

AC-DC MIL-COTS

PRODUCT # SW2513000-28-01

100–264 VAC Input Voltage	50–400 Hz Frequency	1 Phase
28 VDC Output Voltage	400 W Output Power	1 # of Outputs



Actual product appearance may vary.

PRODUCT DESCRIPTION

Designed and built with quality assurance, this AC-DC power supply is designed to perform and protect in inhabited environments. It is environmentally sealed to meet IP67 when mated with connectors and cable assemblies. It is densely packaged, weighing approximately 8.4 lb, and is natural convection cooled. This solution is designed to meet the input power requirements of MIL-STD-704F and to perform in environments where aircraft electric power is used.

ENVIRONMENT

Designed to meet MIL-STD-810



TEMPERATURE

-40°C to +71°C operating, -40°C to +85°C non-operating



HUMIDITY

Up to 100% condensing with sealed mating connectors and cable assemblies attached



VIBRATION

Designed to meet NAVMAT P-9492 (random) and MIL-STD-202G, Method 201 (sinusoidal)



SHOCK

Designed to meet MIL-STD-202, Method 213, Test Condition J



EMI

Designed to meet MIL-STD-461G, CE101, and CE102

FEATURES

- Single output of 28 V at 400 W
- 100–264 VAC, single phase, 50–400 Hz input
- Designed to meet MIL-STD-704F
- Efficiency > 86%
- Holdup 50 ms at full load
- Input current THD < 3% at full load and 120 Vrms and 60 Hz; < 4% at full load and 120 Vrms and 400 Hz
- Minimum power factor of 0.99 lagging at full load and 120 Vrms and 60 Hz; 0.99 leading at full load and 120 Vrms and 400 Hz
- Output current maximum of 16.67 A
- Ripple $\leq 1\%$
- Regulation +3%, -10%, line and load
- Isolated input/output, input/chassis, output/chassis

CONTACT US



2001 Fulling Mill Road | Middletown, PA 17057
717.939.2300 | CAGE: 60642

ACTPower.com | 

AC-DC MIL-COTS

PRODUCT # SW2513000-28-01

MECHANICAL INFORMATION

- 10.05" (L) x 7.25" (W) x 2.65" (H) Max
- Approx. 8.4 lb
- Clear Iridite, Chemically filmed in accordance with MIL-DTL-5541, Type 2, Class 1A
- Environmentally sealed to meet IP67 when mated with connectors and cable assemblies
- Alternative connector finishes may be available—contact us to learn more


CONNECTORS

J1 Input: P/N D38999/24WB98PN	
PIN	DESCRIPTION
A	100/264 VAC HOT
B	N/C
C	100/264 VAC NEUTRAL
D	GND (Chassis)
E	N/C
F	N/C

Suggested Mate: D38999/26WB98SN

J2 Output: P/N D38999/20WE6SN	
PIN	DESCRIPTION
A	N/C
B	+ V _{OUT}
C	+ V _{OUT}
D	- V _{OUT}
E	- V _{OUT}
F	N/C

Suggested Mate: D38999/26WE6PN

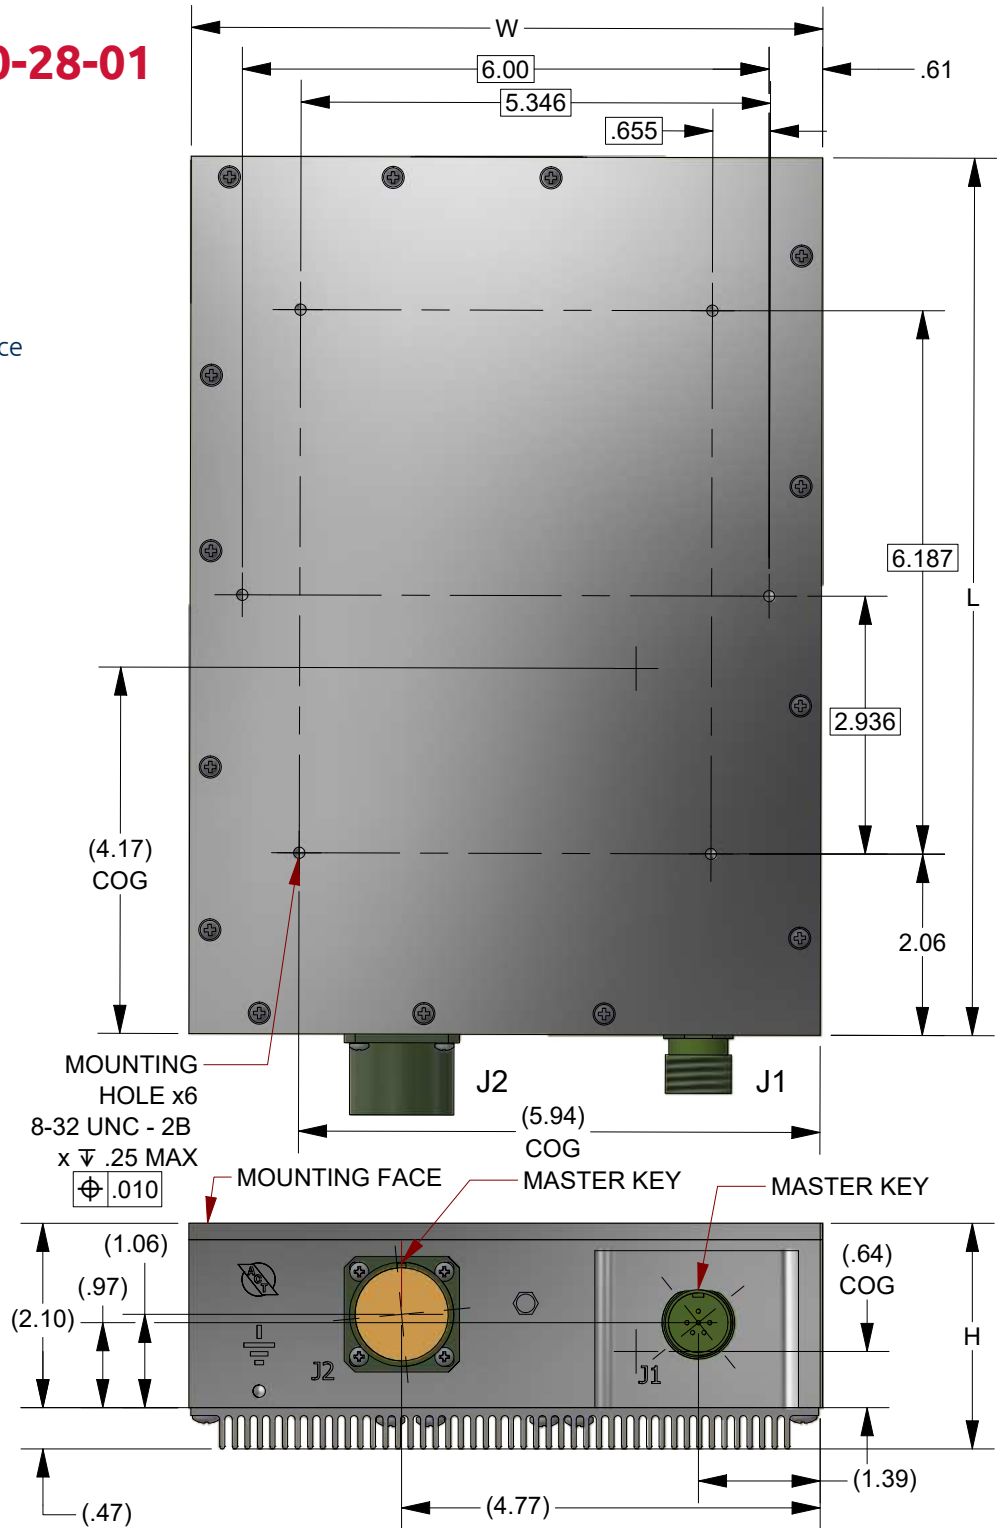

CONTACT US



2001 Fulling Mill Road | Middletown, PA 17057
717.939.2300 | CAGE: 60642

ACTPower.com | 

AC-DC MIL-COTS

PRODUCT # SW2513000-28-01

COOLING

Natural convection cooling

ISOLATION & PROTECTIONS

ISOLATION

- Input/Output > 10 Megohms at 400 VDC
- Input/Chassis > 10 Megohms at 400 VDC
- Output/Chassis > 10 Megohms at 50 VDC

PROTECTION

Overtemperature, short circuit, overvoltage, undervoltage, and overcurrent with auto recovery



MAKE IT A MOTS

The right power solution helps keep equipment functioning properly in the field. MOTS, or Modified Off-The-Shelf, power supplies are adapted, ruggedized, and designed to meet the unique demands of your application.

The fast, budget-friendly answer for meeting your environmental requirements—ask us about making this power supply a MOTS.

SW2513 SERIES SELECTOR GUIDE

ACT Product #	V _{IN} (VAC)	Phase	Freq. (Hz)	# of Outputs	V _{OUT} (VDC)	Output Power (W)	Heatsink
SW2513000-24	100-264	1	50-400	1	24	400	N
SW2513000-24-01	100-264	1	50-400	1	24	400	Y
SW2513000-28	100-264	1	50-400	1	28	400	N
SW2513000-28-01	100-264	1	50-400	1	28	400	Y

CONTACT US



2001 Fulling Mill Road | Middletown, PA 17057
717.939.2300 | CAGE: 60642

ACTPower.com | 